



+

P/N:3B6600
BCX85 21MM

**HIGH PERFORMANCE
LITHIUM CELL**

**SIZE
SUB CC**

- + High Rate Capability
 - + Lithium / Bromine Chloride Complex
 - + Custom terminations available

CELL SPECIFICATIONS


Open Circuit Voltage (25° C)	3.9 V
Rated Discharge Current	100 mA
Rated Capacity	10 Ah
Max Current to achieve 100% Capacity	100 mA
Cell Diameter	21mm (0.83 in.)
Cell Length	127mm (5.00 in.)
Cell Weight	90g
Lithium Weight	3.65g
Self Discharge	3% per year at 25°C
Operating Temperature	-55°C to +85°C -67°F to +185°F

**OPERATING
TEMPERATURE**



PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

25°C discharge

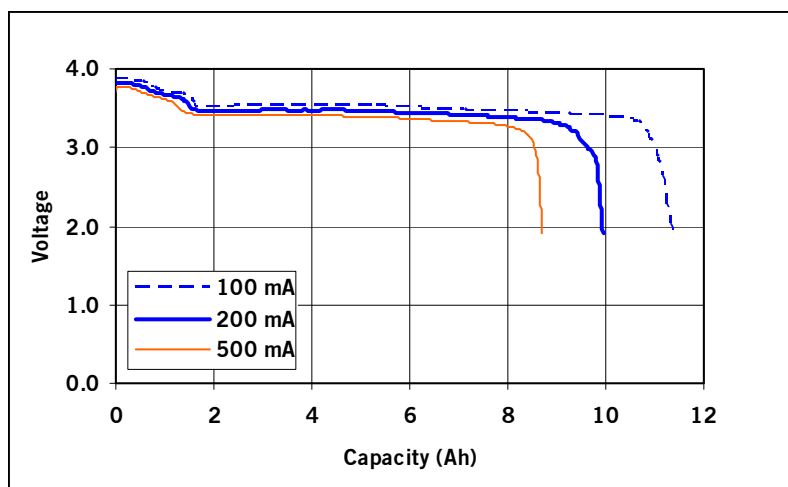

Rev: Mar 2006



+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS