



P/N:3B45  
CSC93 PC

# HIGH PERFORMANCE LITHIUM CELL

SIZE  
PC

+ High Rate Capability


+ Lithium / Sulfuryl Chloride Chemistry

+ Ideal for battery backup applications

## CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.9 V
Rated Discharge Current	1 mA
Rated Capacity	1 Ah
Maximum Continuous Current	10 mA
Cell Diameter	25.4 mm (1.00 in.)
Cell Height	7.6 mm (0.297 in.)
Cell Weight	13g
Lithium Weight	0.3g
Self Discharge	3% per year at 25°C
Operating Temperature	-20°C to +93°C -4°F to +200°F



## OPERATING TEMPERATURE

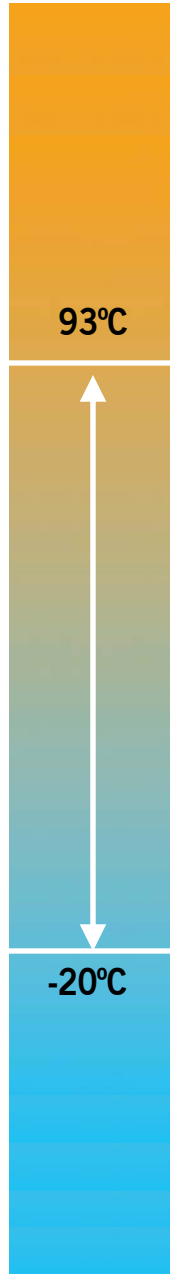

Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

25°C discharge

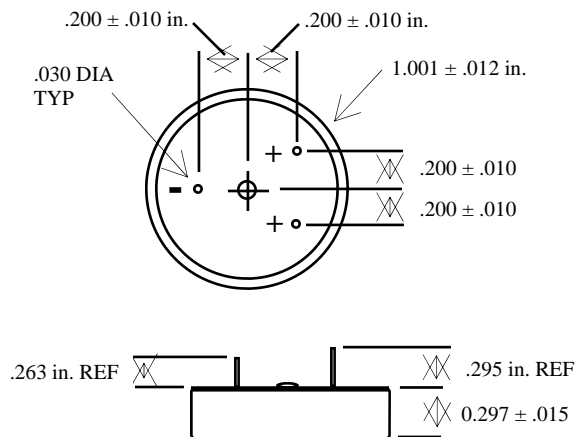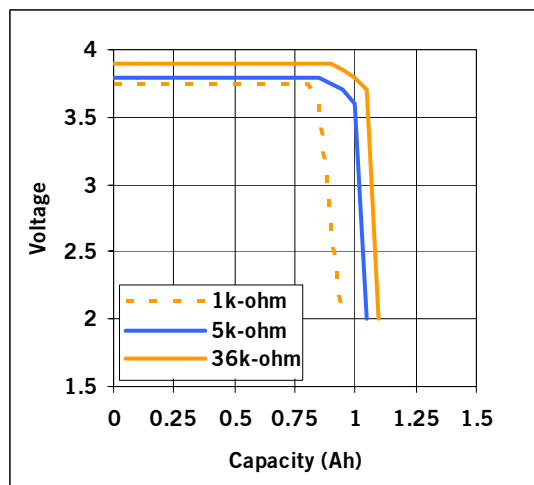

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031  
+ 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM  
+ SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.

