



P/N:3B3900
MWD150

HIGH PERFORMANCE LITHIUM CELL

SIZE
DD


- + High Rate Capability
- + Lithium / Thionyl Chloride Chemistry
- + Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.67 V
Rated Discharge Current	500 mA
Rated Capacity	24 Ah
Maximum Continuous Current	2.0 A
Cell Diameter (nominal)	32.6mm (1.25 in.)
Cell Length (nominal)	127.5 mm (5.0 in.)
Cell Weight	220g
Lithium Weight	7.98g
Safety Fuse	3 A / 5 A

0°C to +150°C
+32°F to +302°F


OPERATING TEMPERATURE

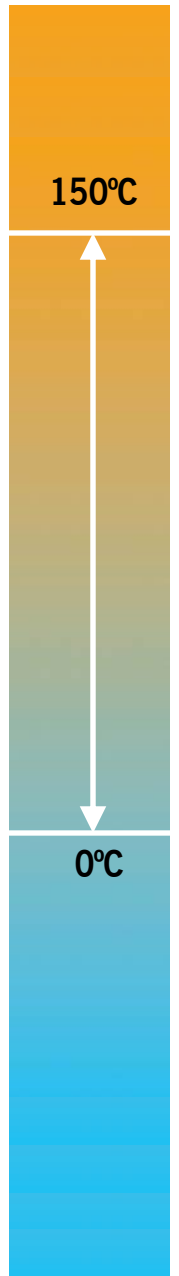


Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

25°C discharge

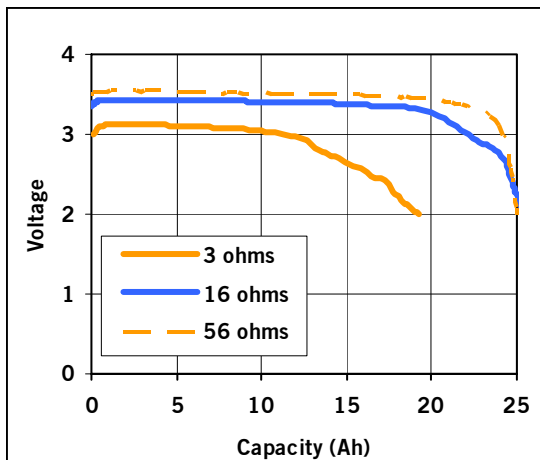

Capacity as a function of current and temperature

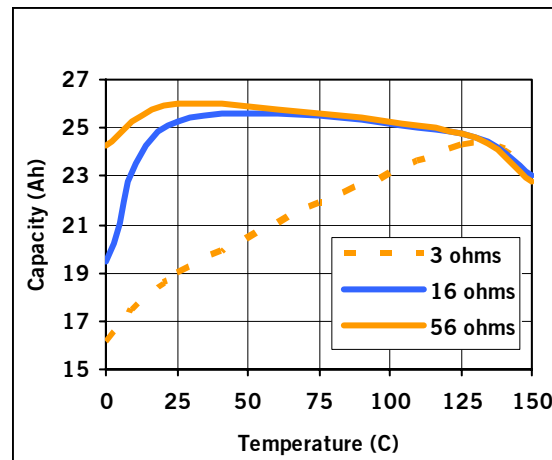

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
+ 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
+ SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS