



P/N:3B2800
PMX150

HIGH PERFORMANCE LITHIUM CELL

SIZE
DD

- + High Rate Capability
- + Lithium / Sulfuryl Chloride Chemistry
- + Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.9 V
Rated Discharge Current	350 mA
Rated Capacity	25 Ah
Maximum Continuous Current	2 A
Cell Diameter (nominal)	32.9 mm (1.295 in.)
Cell Length (nominal)	127.5 mm (5.02 in.)
Cell Weight	215g
Lithium Weight	8.3g
Safety Fuse	5 A
Self Discharge	3% per year at 25°C
Operating Temperature	-20°C to +150°C -4°F to +302°F


OPERATING TEMPERATURE




Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

150°C discharge

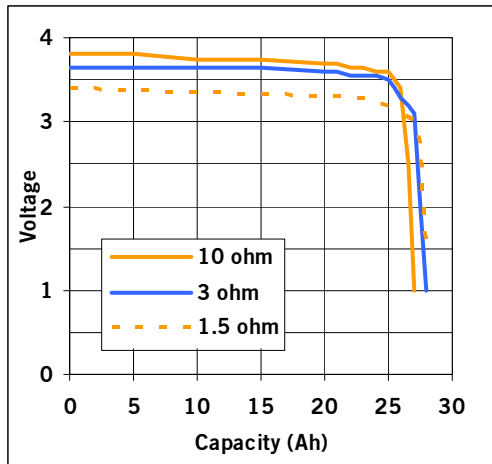

Capacity as a function of current and temperature

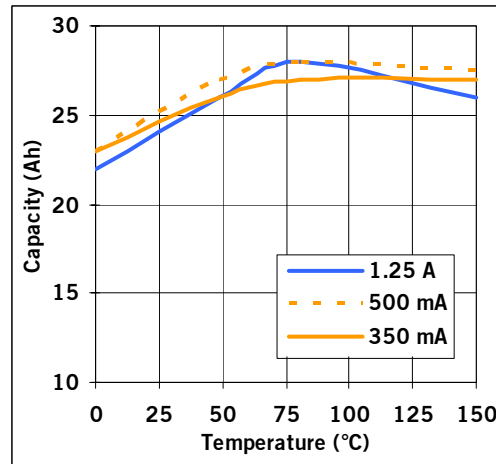

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.

