



P/N:3B3000
PMX150

**HIGH PERFORMANCE
LITHIUM CELL**


**SIZE
CC**

- + High Rate Capability
- + Lithium / Sulfuryl Chloride Chemistry
- + Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.9 V
Rated Discharge Current	50 mA
Rated Capacity	13 Ah
Maximum Continuous Current	500 mA
Cell Diameter (nominal)	24.8 mm (0.975 in.)
Cell Length (nominal)	104.1 mm (4.10 in.)
Cell Weight	101g
Lithium Weight	4.2g
Safety Fuse	3 A
Self Discharge	3% per year at 25°C
Operating Temperature	-20°C to +150°C -4°F to +302°F


**OPERATING
TEMPERATURE**

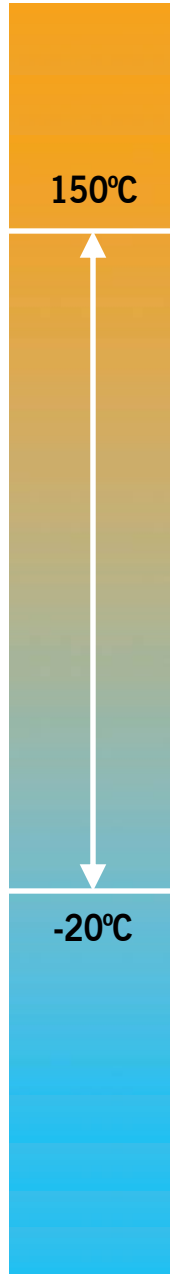


Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

150°C discharge

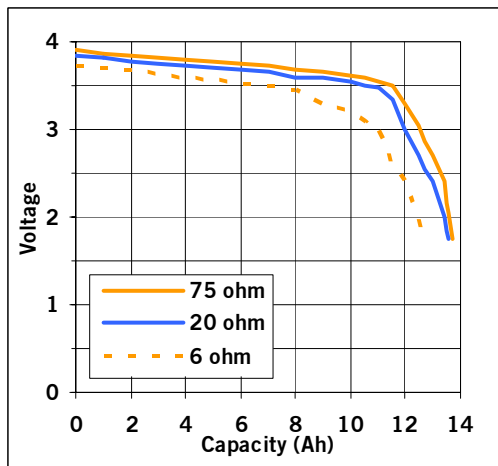

Capacity as a function of current and temperature

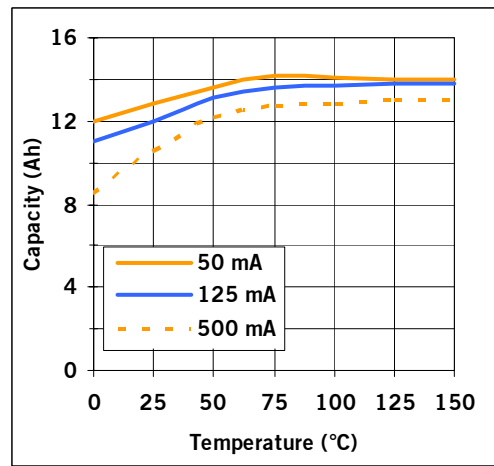

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.

