



P/N:3B5700
PMX150

HIGH PERFORMANCE
LITHIUM CELL

SIZE
1/2 AA

- + High Rate Capability
- + Lithium / Sulfuryl Chloride Chemistry
- + Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.9 V
Rated Discharge Current	20 mA
Rated Capacity	800 mAh
Maximum Continuous Current	150 mA
Cell Diameter (nominal)	13.7mm (0.538 in.)
Cell Length (nominal)	29.9 mm (1.175 in.)
Cell Weight	8.3g
Lithium Weight	0.3g
Safety Fuse	4 A link
Self Discharge	3% per year at 25°C
Operating Temperature	-20°C to +150°C -4°F to +302°F


OPERATING TEMPERATURE




Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

150°C discharge

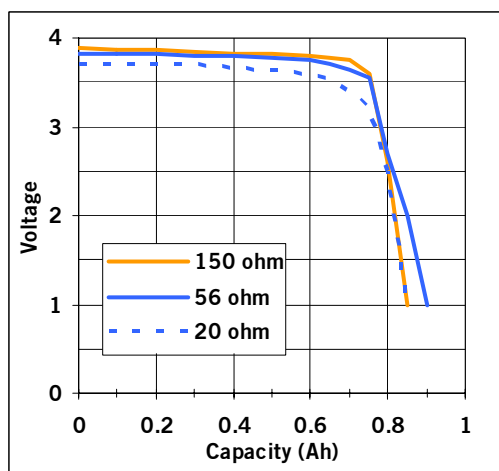

20 mA discharge

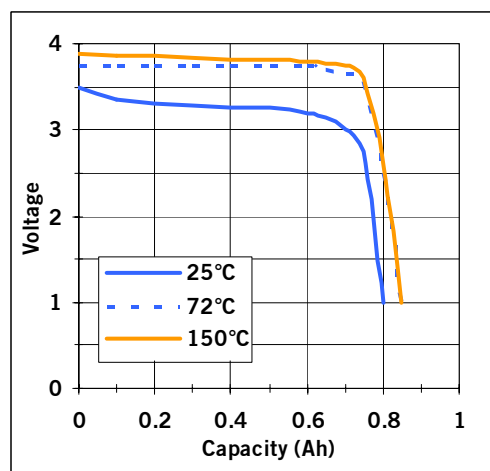

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
+ 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
+ SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS