



**P/N:3B4800
VHT200**

**HIGH PERFORMANCE
LITHIUM CELL**


**SIZE
C**

- + High Rate Capability
- + Lithium / Thionyl Chloride Chemistry
- + Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.6 V
Rated Discharge Current	50 mA
Rated Capacity	4.5 Ah
Maximum Continuous Current	250 mA
Cell Diameter (nominal)	24.8 mm (0.975 in.)
Cell Length (nominal)	53.3 mm (2.10 in.)
Cell Weight	52g
Anode Weight	2.2g
Self Discharge	3% per year at 25°C
Operating Temperature	+70°C to +200°C +160°F to +392°F


**OPERATING
TEMPERATURE**

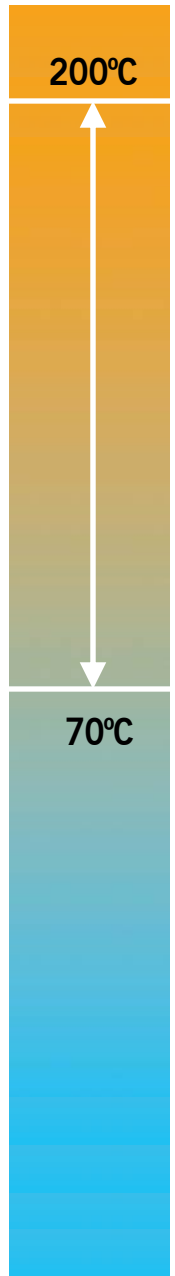


Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

75 ohm discharge

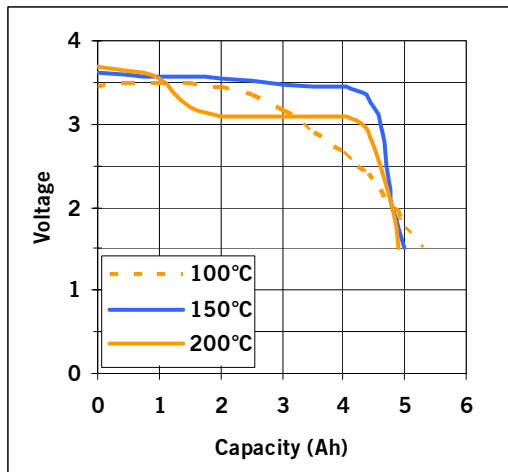

200°C discharge comparison

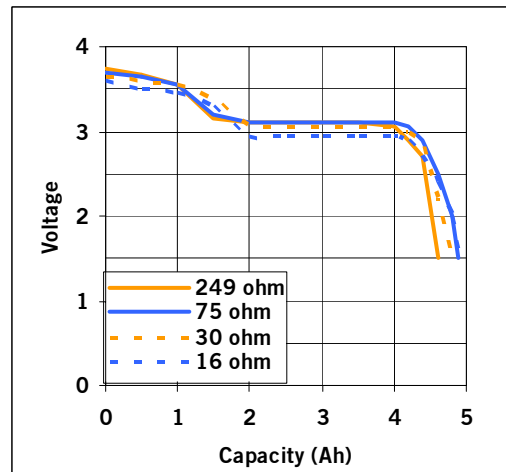

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS