



P/N:4287  
25-102-150MR

# HIGH PERFORMANCE LITHIUM CELL


SIZE  
CC

- + Moderate Rate Capability
- + Lithium / Thionyl Chloride Chemistry
- + Custom terminations available

## CELL SPECIFICATIONS

|                                      |                                    |
|--------------------------------------|------------------------------------|
| Open Circuit Voltage (25° C)         | 3.67 V                             |
| Rated Discharge Current              | 100 mA                             |
| Rated Capacity                       | 13.0 Ah                            |
| Max Current to Achieve 100% Capacity | 190 mA                             |
| Cell Diameter (nominal)              | 24.6 mm (0.97 in.)                 |
| Cell Length (nominal)                | 101.6 mm (4.00 in.)                |
| Cell Weight                          | 95g                                |
| Lithium Weight                       | 4.7g                               |
| Self Discharge                       | 2% per year at 25°C                |
| Operating Temperature                | -40°C to +150°C<br>-40°F to +302°F |


## OPERATING TEMPERATURE

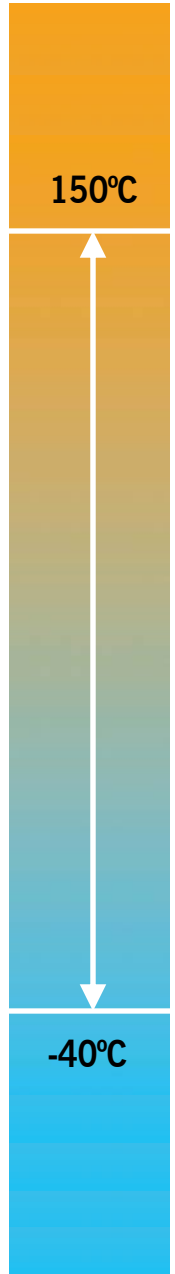


Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

150°C discharge

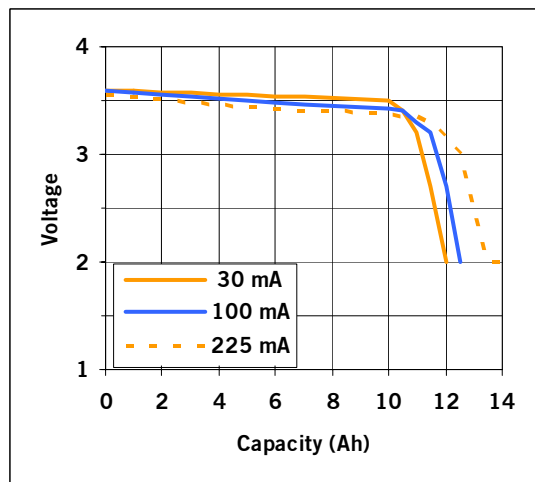

Capacity as a function of current and temperature

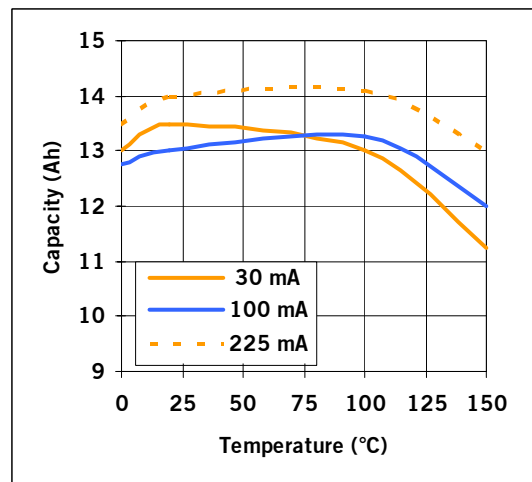

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031  
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM  
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.

