



P/N:4325  
26-84-150MR LMS

# HIGH PERFORMANCE LITHIUM CELL

SIZE  
CC

- + Moderate Rate Capability
- + Lithium / Thionyl Chloride Chemistry
- + Custom terminations available

## CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.67 V
Rated Discharge Current	100 mA
Rated Capacity	11.0 Ah
Max Current to Achieve 100% Capacity	200 mA
Cell Diameter (nominal)	25.4 mm (1.00 in.)
Cell Length (nominal)	84.0 mm (3.30 in.)
Cell Weight	85g
Lithium Weight	4.0g
Self Discharge	2% per year at 25°C
Operating Temperature	-40°C to +150°C -40°F to +302°F

## OPERATING TEMPERATURE




Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

**\*\*Preliminary**

**150°C discharge**

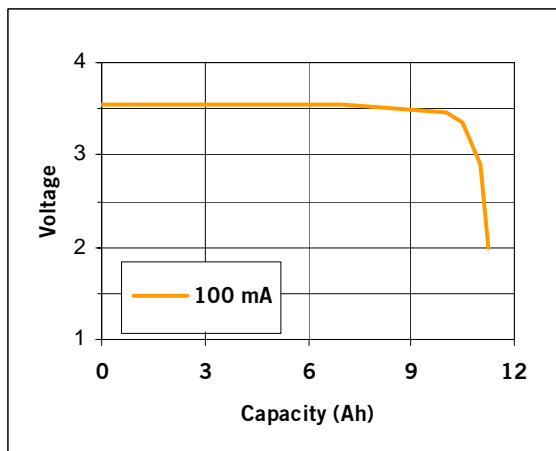

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031  
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM  
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS