



+

P/N:4040
10-35-100

HIGH PERFORMANCE LITHIUM CELL

SIZE
3/2 AAA

- + Low Rate Capability
- + Lithium / Thionyl Chloride Chemistry
- + Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.67 V
Rated Discharge Current	2 mA
Rated Capacity	0.7 Ah
Max Current to Achieve 100% Capacity	10 mA
Cell Diameter (nominal)	9.5 mm (0.37 in.)
Cell Length (nominal)	35.0 mm (1.38 in.)
Cell Weight	4.3g
Lithium Weight	0.3g
Self Discharge	2% per year at 25°C
Operating Temperature	-40°C to +100°C -40°F to +212°F


OPERATING TEMPERATURE



Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

Room Temperature Discharge

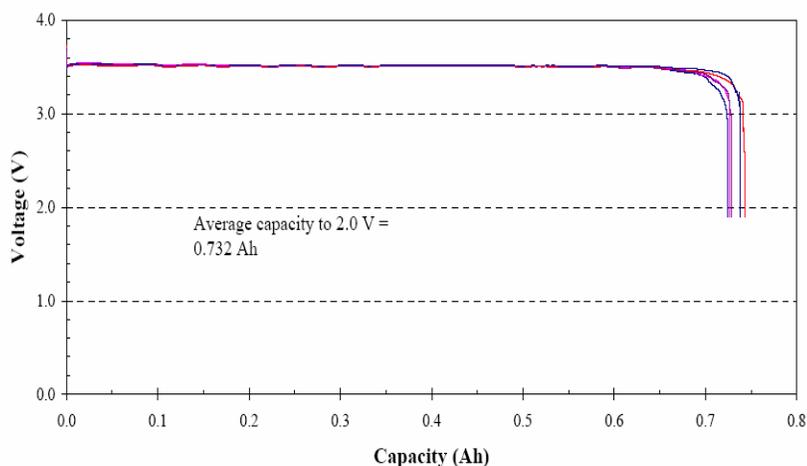

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
+ 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
+ SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS