

## LITHIUM THIONYL CHLORIDE CELL

### Technical Overview

Open Circuit Voltage (25°C)	3.65 V
Rated Discharge Current	30 mA
Rated Capacity	7.5 Ah
Maximum Current to Achieve 100% Capacity	30 mA
Cell Diameter (nominal)	21.00 mm (0.83 in.)
Cell Length (nominal)	101.60 mm (4.00 in.)
Cell Weight	69.5 g
Lithium Weight	3.1 g
Self Discharge	2% per year at 25°C
Operating Temperature	+50°C to +180°C
	+122°F to +356°F

### Key Features:


- Primary chemistry (non-rechargeable)
- Low rate capability
- Bobbin style construction
- Stainless steel container
- Hermetic glass-to-metal sealing
- Wide operating temperature range as low as +50°C and up to +180°C
- Low self discharge rate (2% per year at 25°C)
- Restricted for transportation (Class 9)
- Custom terminations available

### Main Applications:

- Memory back-up
- Animal telemetry
- Low current downhole oil and gas

NOTE: This list does not include all potential applications, please consult Electrochem for your specific application needs.

### Discharge at 30 mA, 120°C

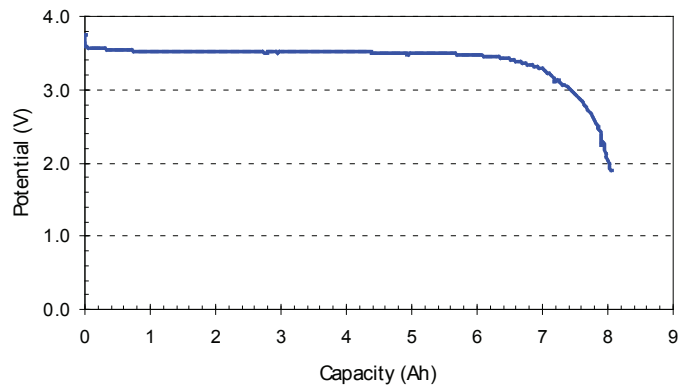

NOTICE: The information on this datasheet is for single cells only. Please consult with Electrochem if you are interested in additional information. The information in this document is subject to change without notice and does not constitute a warranty of performance.

曾友先

13145841820